

Industrial L2+ 8-Port 10/100/1000T 802.3at PoE + 2-Port 1000X SFP Managed Ethernet Switch

Features


- ▶ Support 8x10/100/1000Base-T + 2x1000Base-X SFP
- ▶ 10/100/1000Mbps RJ45 Port supports Full/Half-duplex, Auto-negotiation, Auto MDI/MDIX
- ▶ IEEE802.3af/at compliant
- ▶ DIP Switch supports one-key VLAN, one-key Ring Management, PoE Reset and 250m PoE Network
- ▶ Support connecting USB-C port for easy management, without the need to access the RS232 serial port at all
- ▶ 9K Bytes Jumbo Frame
- ▶ IEEE 802.3az Energy Efficient Ethernet



Overview


LNK-TH208MP series is the L2+ managed 8-port 10/100/1000Base-T 802.3at PoE + 2-port 1000Base-X SFP hardened Ethernet switch. The Switch has 8 TP ports and 2 fiber ports. The TP (RJ45) supports 10/100/1000Base-T(X), Full/Half duplex mode, and auto MDI/MDI-X connection; 1000Base-X SFP port supports 1 or 2 core Single-mode or Multi-mode fiber. With its reliable design and ease of use, the product is a great choice for integrating networks consisting of network devices such as IP cameras and wireless access points between remote locations.

Application

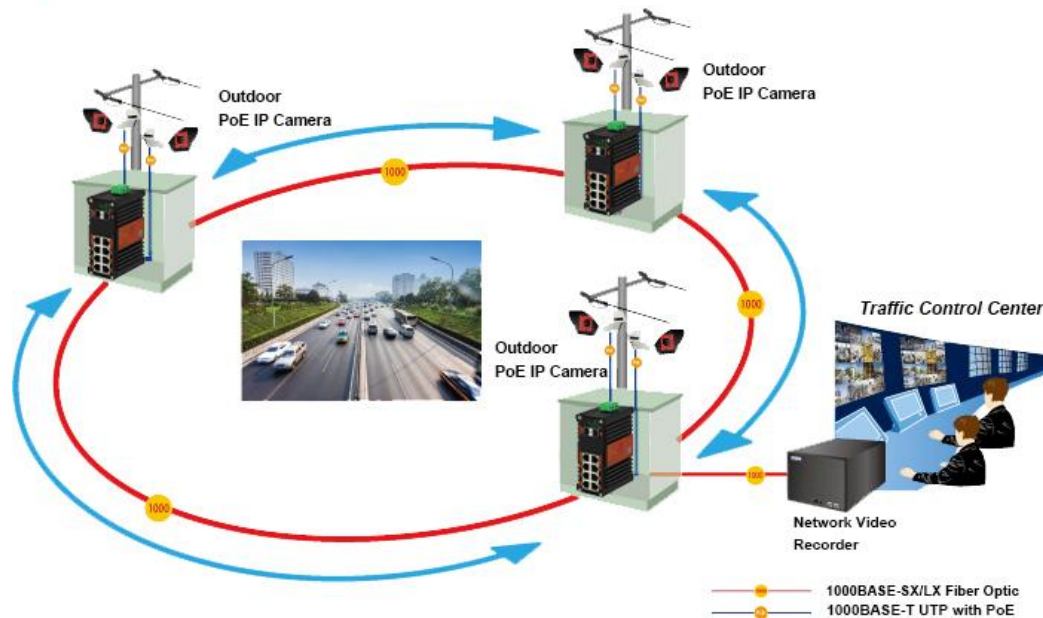

Technical Indexes

Ethernet	
Standards:	IEEE802.3 10BASE-T
	IEEE802.3u 100BASE-TX/FX
	IEEE802.3ab 1000BASE-T
	IEEE802.3z 1000BASE-X
	IEEE802.3ae 10GBase-R
	IEEE802.3p QoS
	IEEE802.1d Spanning Tree
Forward & Filtering Rate:	14,880pps (10Mbps)
	148,800pps (100Mbps)
	1,488,000pps (1000Mbps)
	1,488,000,000pps (10000Mbps)
Packet Buffer Memory:	12M bits
Processing Type:	Store-and-Forward
Backplane bandwidth	110Gbps
Max Packet Length:	9K Bytes Jumbo Frame
Address Table Size:	8K MAC Addresses
Interface	
Connector:	8 x RJ45
RS485:	1 x RS485 (Optional)

Optical Port:	2 x 1000Base-X SFP			
USB-C:	1 x USB-C (for Management)			
RS485 Serial Interface (Optional)				
Physical interface	Industrial standard 3-pin screw terminal			
Data type	1Ch RS485 Bi-Direction			
RS-485 signals	Data +, Data-, GND			
Serial port line distance (copper)	1000 meters			
Baud rate	0 ~ 800kbps			
PoE (Power over Ethernet)				
Standard:	IEEE 802.3at Power over Ethernet Plus			
	IEEE 802.3af Power over Ethernet			
Port:	RJ45			
Power Pin Assignment	4/5(+), 7/8(-)			
PoE Budget:	Up to 240-watt PoE budget			
Environmental				
Operating Temperature:	-40°C to 80°C (-40°F to 176°F)			
Storage Temperature:	-40°C to 85°C (-40°F to 185°F)			
Relative Humidity:	5% to 95% non-condensing			
MTBF	> 200,000 hrs			
Electrical and Mechanical				
Input Power:	48~57VDC, Redundant Power (6-pin Terminal Block)			
Power Consumption:	8W Max.(PoE in Use<240W)			
Protection:				
Power Input Overload:	Automatic Resettable			
Reverse Polarity:	Present			
DIP Switch				
4-digit DIP switch function 	DIP	Function	Settings	
	SW 1	VLAN	ON - Enabled	OFF - Disabled
	SW 2	Ring Management	ON - Enabled	OFF - Disabled
	SW 3 (to be upgraded)	250m PoE Network	ON - Enabled	OFF - Disabled
	SW 4 (to be upgraded)	PoE Reset	ON - Enabled	OFF - Disabled
LED Indicators:				
PWR:	Power Status			
Ethernet (Per Port):	Link/Activity			
PoE:	PoE Status			
Fiber:	Gigabit SFP Port: F9~F10			

Dimensions (WxDxH):	150 x 118 x 60 mm
Weight:	1Kg
Casing:	Aluminum Case
Mounting Options:	DIN-Rail mount
Software Features	
Redundancy Protocols	Support STP/RSTP/MSTP/ERPSv2, Link Aggregation
Multicast Support	Support IGMP Snooping V1/V2/V3, support GMRP, GVMP, 802.1Q
VLAN	Support IEEE 802.1Q 4K VLAN, support QinQ, Double VLAN,
Time Management	SNTP
QOS	Flow-based redirection Flow-based rate limiting Flow-based packet filtering 8*Output queues of each port 802.1p/DSCP priority mapping Diff-Serv QoS, Priority Mark/Remark Queue Scheduling Algorithm (SP, WRR, SP+WRR)
ACL	Port-based Issuing ACL ACL based on port and VLAN L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc
PoE Management	Total power limit of PoE power supply PoE output power allocation PoE output priority configuration PoE working status Scheduling of PoE operation
Diagnostic Maintenance	Support port mirroring, Syslog, Ping
Management Function	Support CLI, WEB, SNMPv1/v2/v3, Telnet server for management, IEEE 802.1X, LLDP, DHCP Server/Client (IPv4/IPv6), Cloud/MQTT
Alarm Management	Support 1 way relay alarm output, RMON, TRAP
Security	Broadcast Storm Protection, HTTPS/SSLv3, AAA & RADIUS, SSH2.0 Support DHCP Snooping, Option 82, 802.1X security access, Support user hierarchical management, ACL access control list, Support DDOS, port-based MAC filtering / binding, MAC black holes, IP source protection, Port isolation, ARP message speed limit
Advance Layer 2+ Features	IPv4/IPv6 Management Static Route
Regulatory Approvals	
ISO9001, CE, RoHS, FCC	
EN55022:2010+AC: 2011, Class A	
EN 61000-3-2: 2006+A1: 2009+A2: 2009	
EN 61000-3-3: 2013	
EN55024:2010	

IEC 61000-4-2: 2008 (ESD)
IEC 61000-4-3: 2010 (RS)
IEC 61000-4-4: 2012 (EFT)
IEC 61000-4-5: 2014 (Surge)
IEC 61000-4-6: 2013 (CS)
IEC 61000-4-8: 2009 (PFMF)

Ordering Information

Model	Description
LNK-TH208MP	Industrial L2+ 8-Port 10/100/1000T 802.3at PoE + 2-Port 1000X SFP Managed Ethernet Switch
SFP Options	► SFP option. Please select your SFP on our SFP Options Page
	► SFP module is to be purchased separately.
Mounting Options	► Default DIN-Rail Bracket installed
Power Options	► DIN-Rail Power Supply. Open Wire for Terminal Block.
	► Power Supply is to be purchased separately.